

TM Palletizing Operator



- 16 Certified PL=d Cell Level Safety Functions
- Start toPalletize in 5 Minutes!
- TMstudio Palletizing Wizard: palletizing wizard and collision detection





TM Operator

Click & Run, Cheer & Apply

What is TM Operator?

- A ready to use, all-in-one application based robot cell.
- With application based software.
- Reduce programming effort.
- Start to work within 5~10 minutes.



www.tm-robot.com

Application Based Software

TMstudio Palletizing Wizard

Provide the optimization solution for palletizing.

- Customizable box, pallet size.
- Generate point file offline.
- Custom box arrangement and sequence.
- Palletizing simulation and collision detection.






Software packages for TMflow™

Main Function

- Calibration of pillar. (fig. A)
- Main function based on file generated from TMstudio Palletizing Wizard, and settings for the cell. (fig. B)

Flexibility for functional expansion by user

- Using customized gripper.
- Adding more vision functions like barcode reading.
- Adding downward sensor detection before releasing the box.
- Slip sheet application programming.

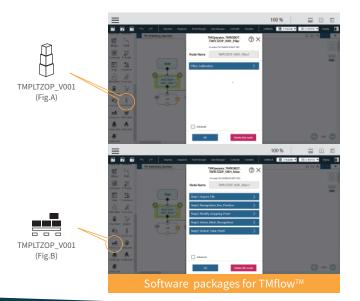

Specification

Specification	TM Palletizing Operator-TM12	
Stack Height	1900mm	
Maximum Payload*	10kg	
Maximum Pallet Speed	Up to 7 boxes/object per minute	
Certification	CE, Machine Directive 2006/42/EC,ISO 12100, EN 60204-1, ISO 10218-2 (partly completed machinery), ISO 13849-1, ISO/TS 15066	
Safety Functions	16 cell level safety functions with 3rd Party certification PL=d according to ISO13849-1	
Teach Pendant	10.1" capacitive touch screen, with ESTOP and Enabling Switch, Cable length: 5m, 2 USB ports provided	
IP Rating	IP54 for Robot Arm, IP65 for Teach Pendant, IP 32 for Gripper and rest parts	
Interface	Support multiple safety inputs and safety outputs: emergency stop, safeguard pause, Safeguard Human-Machine Safety Setting	
Software	Offline programming & Simulation: TMstudio Palletizing Wizard Setting and Running: TM Palletizing Operator Software Packages	
Eye in Hand(Built in)	1.2M/5M pixels, color camera	
Eye to Hand(Optional)	Support Maximum 2 GigE cameras	
* The payload at robot flange is 12kg.		

Product Content

Item	Standard Package
TM12 robot Arm & control box	✓
Teach Pendant and cable	✓
TM Palletizing Operator Base, including -Indication light for Pallet detection -Lifting Pillar module & Drag Chain	√
Pneumatic Suction Gripper Set, including -Pneumatic Suction Gripper -Pneumatic Set: Air preparation unit, Solenoid valve, Air tube to the tool end -Cable Conduit	√
Software License Dongles 1 for TMstudio Palletizing Wizard 1 for TM Palletizing Operator Software Packages	√